

# ELRO Pressure Bratt Pans 2300

 Menu plan analysis based on products, amounts, etc.

 Selecting the ideal cooking methods

Coordinating and selecting appliance technology

Calculating the appliance capacity required

Optimising surface and energy requirements

Determining the type of installation

 Calculating cost savings

 Installation and start-up

 User support by ELRO kitchen chefs

 ELRO After Sales Service Worldwide

Multifunctionality and superb performance for health-conscious cooking and roasting



**+65%** Productivity

**+15%** Vital Quality

**+50%** Hygiene

ELRO-Werke AG  
Wohlerstrasse 47  
5620 Bremgarten  
Schweiz  
Tel. +41 (0)56 648 91 11  
verkauf@elro.ch

ELRO Grossküchen GmbH  
Industriering Ost 31  
47906 Kempen  
Deutschland  
Tel. +49 (0)2152 20 559 - 0  
verkauf@elro-d.de

ELRO Grossküchen GmbH  
Gewerbepark Habach 19  
5321 Koppl  
Österreich  
Tel. +43 (0)6221 20499  
verkauf@elro.at

[www.elro.ch](http://www.elro.ch)

**E L R O**

**E L R O**



## +65% Productivity

The High-speed system increases productivity by factors: it features the performance of a combi-steamer – but, unlike conventional devices, does it in a matter of seconds and directly inside the pans or kettles.

Using and controlling your appliances is child's play with the ELRO QCS: cooking programs can be called up according to food type and consistent cooking processes are guaranteed.

The main basic preparation methods have already been stored in the system in order to make best use of the multi-functional features of ELRO appliances. Methods are programmed into the ELRO QCS recipe book so that they can be called up quickly and easily.



## +15% Vital Quality

Vital pressure cooking is the healthiest and at the same time the most energy-saving way of increasing productivity, cutting production times, increasing flexibility and improving the quality of the food.




## +50% Hygiene

ELRO HPC uses a high-pressure jet for ultra-fast cleaning. That makes for unbeatable cost savings.

For easy cleaning, it is essential that appliances are perfectly assembled. The ELRO hygienic link joins work surfaces and unit fronts almost seamlessly, making for quick, easy and hygienic cleaning.

For absolute hygiene, attention must be paid to every detail. The hinge meets the highest standards for easy cleaning, maximum stability and long service life.

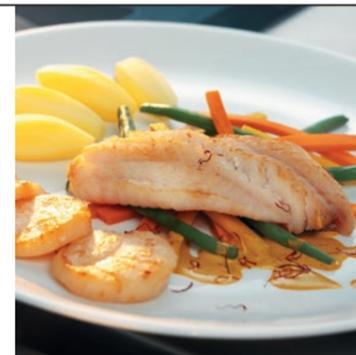

Increase productivity and quality using  
ELRO Pressure Bratt Pans



# ELRO – the small but distinct difference



## ELRO High-speed

The High-speed system reduces preparation time by 50% – regardless of whether the appliance is completely or only partially filled. When combined with pressure cooking, the complete cooking process can be reduced by up to 50%.

Thanks to High-speed performance, heat is transferred to food faster and penetrates right to the core of any Gastronorm container, so the quality of the cooked food is not only better but also more consistent.

## ELRO PMS, Power Management System

By using the ELRO PMS to reduce the power requirements for a cooking assembly consisting of 3 to 12 appliances or of several assemblies with 3 to 12 appliances, the costs for the basic fee can be reduced by 30%.

With the ELRO PMS, installation costs are considerably lower in comparison to other building management systems. No additional hardware is necessary – a main cable with a smaller cross-section can be used.

## ELRO HPC, High Pressure Cleaning

Regardless of time, place and training, ELRO HPC means that everyone can quickly, easily and hygienically clean an appliance with high pressure.

Thanks to ELRO HPC, tedious and time-consuming cleaning of edges, corners and tight spaces is now definitely a thing of the past.

## ELRO Hygienic Hinge

The gap between the hinge unit and the lid can be easily cleaned using the ELRO HPC (High Pressure Cleaning) system.

Having one hinge on each side of ELRO appliances ensures stability and lid tightness. Obviously, this also significantly increases the life of the lid.

## Autolift Pastamat

The programmable Autolift ensures that, regardless of the quantity, cooking processes are reproducible and that quality is consistent for various types of pasta or fried food.

The integrated shaker function in the Autolift cuts out a work step when shaking and draining food, which used to have to be done by hand.

## ELRO Drain Valve

The ELRO drain valve allows food to be dispensed into small or large containers with no splashes or other spills on the floor.

The pipes to the ELRO drain valve are designed so that no food residues remain in them. The drain valve on bratt pans is positioned so that the frying surface is not affected.





## Additional advantages of the ELRO Pressure Bratt Pans:

**Core Temperature Probe:** Accurate cooking to the exact degree made easy, with 6-point measurement

**Process Status Display:** Quick and easy monitoring of operating status

**easy-tilt and easy-tilt electronic:** Easy and accurate portion dispensing

# Technical Data

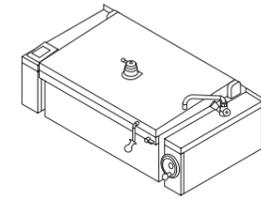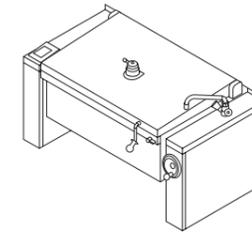

		non-tilting				non-tilting				tilting			
		DBGN22	DBGN23	DBGN32	DBGN33	DBGN22C	DBGN23C	DBGN32C	DBGN33C	DBKGN22	DBKGN23	DBKGN32	DBKGN33
<b>Dimensions / Capacity / Power</b>													
Frying surface (mm)	width	680	680	1030	1030	680	680	1030	1030	680	680	1030	1030
	depth	550	550	550	550	550	550	550	550	550	550	550	550
Capacity (litres)		90	112	136	170	90	112	136	170	86	108	131	165
Pan depth (mm)		240	300	240	300	240	300	240	300	240	300	240	300
External dimensions (mm)	width	1050	1050	1400	1400	1050	1050	1400	1400	1200	1200	1550	1550
	depth	800	800	800	800	800	800	800	800	800	800	800	800
	height	700	700	700	700	400	400	400	400	700	700	700	700
Connected load pan only (kW / A)		15.1 / 21.7	15.1 / 21.7	23.5 / 33.9	23.5 / 33.9	15.1 / 21.7	15.1 / 21.7	23.5 / 33.9	23.5 / 33.9	15.1 / 21.7	15.1 / 21.7	23.5 / 33.9	23.5 / 33.9
Connected load pan and ELRO High-speed integrated (kW / A)		30.1 / 43.7	30.1 / 43.7	43.5 / 62.8	43.5 / 62.8								
Voltage 400 V 3LPE 50/60 Hz		●	●	●	●	●	●	●	●	●	●	●	●
<b>Installation types</b>													
ELRO installation wall		○	○	○	○	○	○	○	○	○	○	○	○
ELRO hygienic installations		○	○	○	○	○	○	○	○	○	○	○	○
ELRO CNS base		○	○	○	○	○	○	○	○	○	○	○	○
ELRO feet		○	○	○	○	○	○	○	○	○	○	○	○
Wall mounting		○	○	○	○	○	○	○	○	○	○	○	○
Concrete plinth		○	○	○	○	○	○	○	○	○	○	○	○
<b>Mobile version</b>		■	■	■	■					■	■	■	■
<b>Options</b>													
ELRO QCS (Quick Cook Select)		●	●	●	●	●	●	●	●	●	●	●	●
ELRO HPC (High Pressure Cleaning)		●	●	●	●	●	●	●	●	●	●	●	●
ELRO PMS (Power Management System)		●	●	●	●	●	●	●	●	●	●	●	●
ELRO PCS (Pressure Control System)		●	●	●	●	●	●	●	●	●	●	●	●
ELRO WDS (Water Dosing System)		○	○	○	○	○	○	○	○	○	○	○	○
ELRO drain valve		●	●	●	●	●	●	●	●	○	○	○	○
ELRO High-speed integrated		○	○	○	○								
ELRO High-speed extern		○	○	○	○	○	○	○	○	○	○	○	○
ELRO hygienic link for assembly		○	○	○	○	○	○	○	○	○	○	○	○
ELRO hygienic hinge		●	●	●	●	●	●	●	●	●	●	●	●
ELROlit frying bottom		●	●	●	●	●	●	●	●	●	●	●	●
Connection to external power limitation		○	○	○	○	○	○	○	○	○	○	○	○
Autolift Fritomat		○	○	○	○	○	○	○	○	○	○	○	○
Autolift Pastamat		○	○	○	○	○	○	○	○	○	○	○	○
Fritomat		○	○	○	○	○	○	○	○	○	○	○	○
Overall height 400 mm						●	●	●	●	○	○	○	○
easy-tilt										●	●	●	●
easy-tilt electronic										○	○	○	○
Core temperature probe		○	○	○	○	○	○	○	○	○	○	○	○
Process status display		●	●	●	●	●	●	●	●	●	●	●	●

We reserve the right to make technical modifications. ■ More detailed information and specific technical data on the ELRO Mobile System is set out in the «The ELRO Mobility Concept» and «The ELRO Range of Services» brochures.

● Standard ○ ■ Optional